



AFTER SALES
TMA

Always a differential.

THE EVOLUTION OF POWER



WATCH OUR VINASSE CART

**LOCALIZED
VINASSE
APPLICATOR
TRUCK**



CVX 22500 VINASSE CART


Developed as fertigation equipment, the CVX 22500 aims for an accurate application over the sugarcane row, avoiding waste and improving the productivity of the sugarcane fields. It can be applied to the straw, the plant itself, or the ratoon. Its high-performance supply system consists of a supply set with a hose and a rotating winch.

The equipment was built to be used all year round and not only during the harvest, which is when vinasse is available. It can be used in the distribution of liquid fertilizer, even in water irrigation in times of droughts as well as in water rescue.

TECHNICAL SPECIFICATIONS


CAPACITY	22.500 L
PUMP FLOW	300 m ³ /H and 5000 L/MIN
MIN / MAX APPLICATION RATE	15.000 / 70.000 L/Ha
MIN REQ POWER	200 HP
COUPLING	PINBALL Ø 100 mm
SUSPENSION	STANDARD - TRIDEM 1st DIRECTIONAL AXLE 30° OPTIONAL - TRIDEM 1st AND 3rd DIRECTIONAL AXLE 30°
BRAKE SYSTEM	BRAKE ON 2 AXLES (SPRING BRAKE)
GAUGE	3.000 mm / 2.400 mm
HIGH FLOTATION AND LOW COMPACTION TIRES	600/50-22.5 OPTIONAL - 600/50R22.5
SPACING	Conventional: 1,5 x 1,5 m Double Alternating: 0,9 x 1,5 or ask for more options
HYDRAULIC SYSTEM	MIN REQ FLOW 100 L/min RECOMMENDED 130 L/min
AUTOMATION SYSTEM	INDEPENDENT AND ISOBUS AUTOMATION
AVERAGE LOADING TIME	5 minutes

BAR POSITION VERSIONS

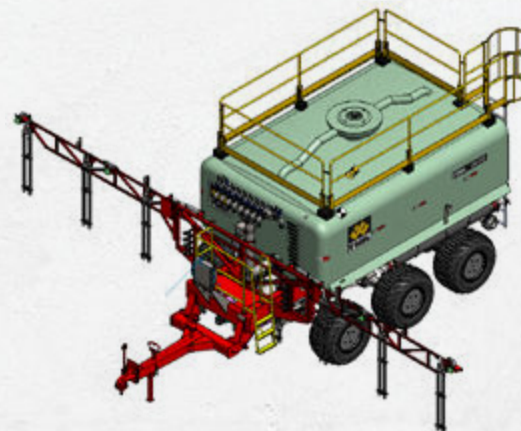

FRONT BAR

- ✓ Better visualization of the bar
- ✓ Higher trampling in the vinasse
- ✓ Minor non-application areas

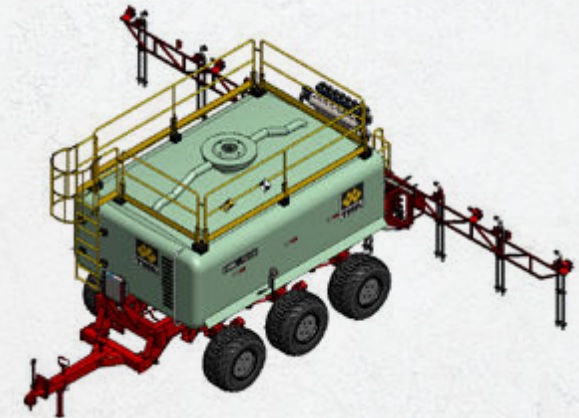

REAR BAR

- ✓ Worse visualization of the bar
- ✓ No trampling in the vinasse
- ✓ Major non-application areas

OPTIONALS

Our vinasse carts can be equipped with options that add even more versatility to your operation. Check out the available options below:

INSECTICIDE APPLICATION AND BIOLOGICAL COMPONENTS KIT

- ▶ Composed by the 2 systems, being 1 tank of 600 L for insecticide and 1 thermal tank of 600 L for biological product.

INSECTICIDE APPLICATION KIT NOZZLE-TO-NOZZLE

- ▶ Composed of an application rate controlled system through an electromagnetic flow meter and controlling valves.
- ▶ Features nozzle-to-nozzle sectioning.
- ▶ Its system controls the pressure in order to keep the spray droplet preserved.
- ▶ Tank with 1,200 L capacity.

LIQUID FERTILIZER APPLICATION KIT

INSECTICIDE INCORPORATION KIT

KIT FOR APPLICATION OF INSECTICIDE INCORPORATED IN THE VINASSE

- ▶ Composed of an application rate controlled system through digital electromagnetic flow meter.
- ▶ Its flow meter has a display for programmed control of the mixture with the vinasse, controlling the amount of solution incorporated into the vinasse.
- ▶ Tank with 1,200 L capacity.

APPLICATION KIT FOR BIOLOGICAL PRODUCTS

- ▶ Composed of an application rate controlled system through an electromagnetic flow meter and controlling valves.
- ▶ It has a nozzle-to-nozzle sectioning and a thermal tank to preserve the biological agents.
- ▶ Its system controls the pressure in order to keep the spray droplet preserved.
- ▶ Tank with 1,200 L capacity.

NOZZLE-TO-NOZZLE CONTROL



FULL ISOBUS AUTOMATION

- Automation that depends on tractor technology, communication can (ISOBUS) between the trailer and the display already on the tractor.
- The tractor must have an ISOBUS socket, with the CAN Network connected to the display and the task controller feature unlocked.



Pro 700



NH Intelliview



GS3/ Gen4



FMX



XCN/ TMX



Standardized ISOBUS connection

ISO UT SYSTEM, plug-and-play, compatible with most Virtual Terminals (VT).
Tractor must have ISO plug and Task Controller (TC) unlock for Section Control Variable Rate (with prescriptions) and Mapping (Data Logging).

FULL INDEPENDENT AUTOMATION

- Automation does not depend on the characteristics or functions that the tractor may have. It works with or without tractor technology.
- It comes with its own display and GPS antenna (Raven).
- It can be used on any tractor.



Antenna



Display CR7



RCM: Controls the speed and cut-off sections row-by-row. Simple diagnostics and readout testing, configuration, and calibration. ISOBUS Compatibility and Task Controller.

Version updated in April 2025



3100, Thomaz Alberto Whately Av.
Pg. Ind. Coronel Quito Junqueira
14075-380 - Ribeirão Preto/SP

Corporate TMA: +5516 3969.4933 | Technical Assistance WhatsApp: +5516 99772.5083

Business WhatsApp: +5516 99629.7181

TMA WWW.TMAMAQUINAS.COM.BR



MADE IN BRAZIL

